XO SPECIFICATION

Customer：

Customer P/N：

TKD P/N：XO25F100000GBZE001

Part Name：SMD 2520 HCSL XO

Product Description：100.000000MHz

Issue Date：2025/5/15

Product Standard：☑Pb free ☑RoHS 2.0 ☑REACH ☑HF

CUSTOMER'S APPROVAL

(PLEASE RETURN A COPY WITH APPOVAL)

TKD Science and Technology Co.,Ltd
泰 晶 科 技 股 份 有 限 公 司

Approved	Checked	Designer
Zhan Chao	Wang Peng	Zhang JingYuan

地址：湖北省随州市曾都经济开发区交通大道1131号

Address： 1131 jiaotong Avenue,Zengdu Economic Development Zone, Suizhou , Hubei

Sales Tel: 0722-7509016, Fax: 0722-7509036, URL: www.sztkd.com

Rev.	Description of Revision History	Date	Designer	Checked By
A	New Revision	2025/5/15	Zhang JingYuan	Wang Peng

XO SPECIFICATION

1.Description : 2520 HCSL Output Oscillator

2.Nominal Frequency : 100.000000MHz

3.Electrical Specifications :

Item	Parameters	Condition	Electrical Specifications			
			Min	Typ	Max	Units
1	Nominal Frequency		100.000000			MHz
2	Oscillation Mode		Fundamental			
3	Frequency Stability Overall	(Note1)	-30		30	ppm
4	Operating Temperature Range		-40		85	℃
5	Supply Voltage		2.97	3.30	3.63	V
6	Current Consumption	Operating			60	mA
7	Standby Function		Yes			
8	Current Consumption(Standby)	OE=Low			30	μA
9	Output Waveform		HCSL			
10	Output Voltage High	RL=50Ω (Terminated to V_{DD}-2.0V) CE=High Level,OUT/OUTN	550		850	mV
11	Output Voltage Low		-150		150	mV
12	Output Rise Time	20%~80% Output Swing			0.5	ns
13	Output Fall Time	80%~20% Output Swing			0.5	ns
14	Enable		Vdd*70%			V
15	Disable				Vdd*30%	V
16	Duty Cycle		45	50	55	%
17	Output Load		50			Ω
18	Start-up Time	90%V_{CC} to Final Amplitude			10	ms
19	RMS Jitter	12KHz - 20MHz			0.5	ps
20	Aging	First year at 25±3 ℃	-3		3	ppm
21	Storage Temperature		-55		125	℃

Note1 Frequency stability includes frequency tolerance@25±3℃ and frequency stability vs. operating temperature range and voltage variance.

4.Test Circuit (HCSL Load)

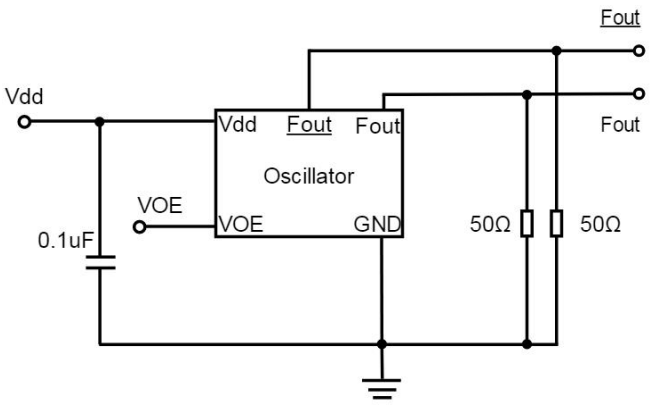

5.Output Waveform (HCSL Load)

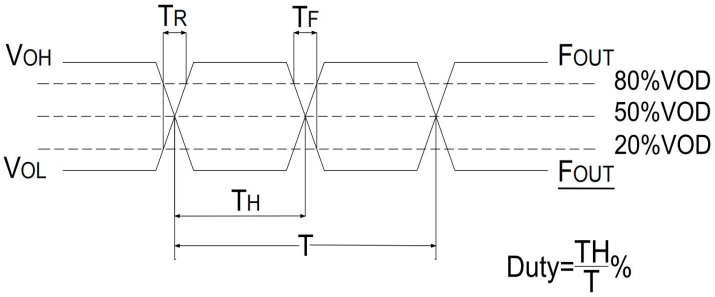

6.Recommended Reflow Profile

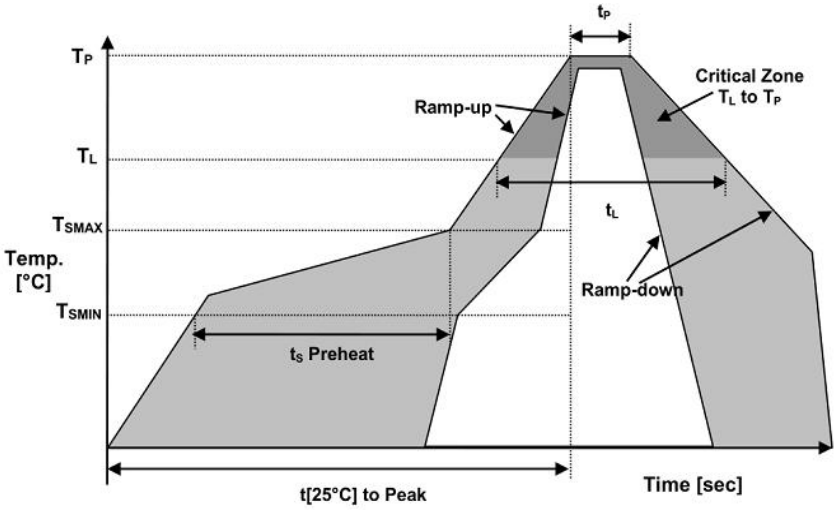

Reflow Profile		
Temperature MIN Preheat	T_{SMIN}	150℃
Temperature MAX Preheat	T_{SMAX}	200℃
Time（T_{SMIN} -T_{SMAX}）	t_S	60-180s
Temperature	T_L	217℃
Peak Temperature	T_P	260℃
Ramp-up Rate	R_{UP}	3℃/s max
Ramp-Down Rate	R_{DOWN}	6℃/s max
Time within 5℃ of Peak Temperature	t_P	10s
Time t(25℃) to Peak Temperature	t(25℃)to Peak	480s
Time	t_L	60-150s

7.Product Dimensions

Unit：mm

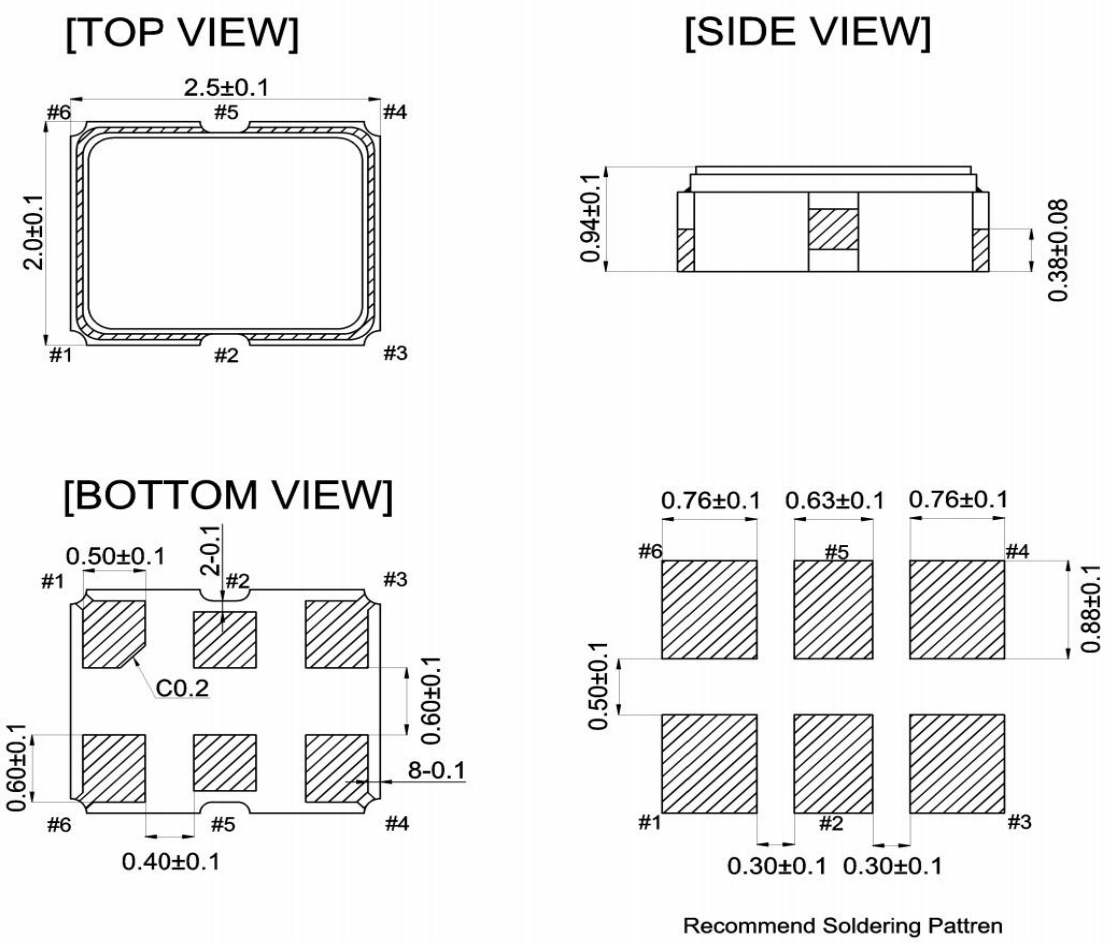

Pin Connection

Name	Connection
pin 1	Tri-State
pin 2	NC
pin 3	GND
pin 4	Fout
pin 5	Fout
pin 6	V_{DD}

To ensure optimal oscillator performance,place a by-pass capacitor of 0.1uF as close to the part as possible between Vdd and GND pads

Function

Pin1 Input	Pin4&5 output
High level	Oscillation Out
Low level	High Z

8.Structure illustration

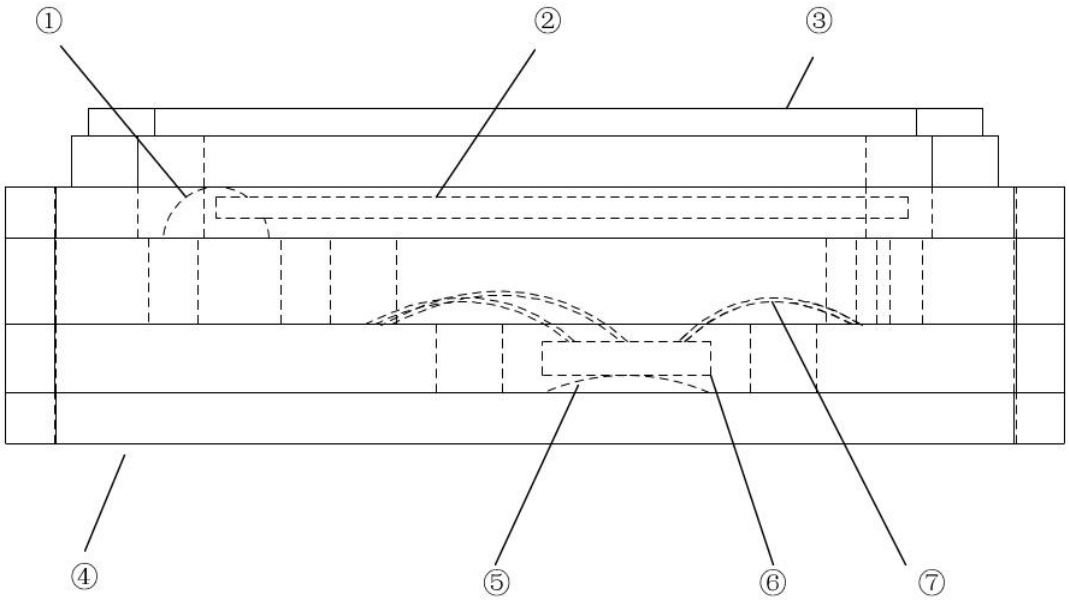

No.	Components	Materials
①	Conductive Adhesive	Ag+Silicone Resin
②	Crystal Blank	SiO_2
③	Lid	Fe-Ni-Co Alloy
④	Base	Ceramic+Noble Metal
⑤	Conductive Adhesive of Solid IC	Ag+Epoxy Resin
⑥	IC	Si
⑦	Gold wire	Au

9.Product Identification (Marking)

T： TKD Logo

H： HSCL Oscillator Code

100A： Frequency Code

●： Pin1 Index

D： Date Code

####： XO Lot Code

Date Code

Year		2019	2020	2021	2022
		2023	2024	2025	2026
		2027	2028	2029	2030
		2031	2032	2033	2034
Month	JAN	a	n	A	N
	FEB	b	p	B	P
	MAR	c	q	C	Q
	APR	d	r	D	R
	MAY	e	s	E	S
	JUN	f	t	F	T
	JUL	g	u	G	U
	AUG	h	v	H	V
	SEP	j	w	J	W
	OCT	k	x	K	X
	NOV	l	y	L	Y
	DEC	m	z	M	Z

This date code will be cycled every four years.

10.Reliability

No.	Item	Test Methods	Criteria
1	Low Temperature Storage	Temperature：-40℃ ± 2℃（or the specification shall prevail） Duration：500 hours	±10.0 ppm
2	High temperature and humidity	Temperature：85ºC ± 2ºC Humidity：RH 85% Duration：500 hours	±10.0 ppm
3	Thermal Shock	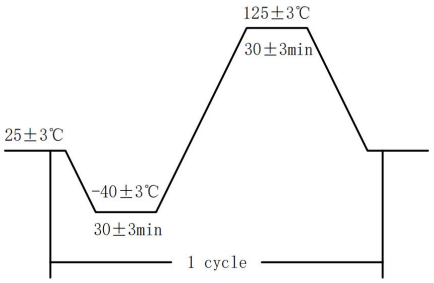 Temperature：-40℃~125℃（or the specification shall prevail） Duration：100 cycles	±10.0 ppm
4	High Temperature Operating Life	Temperature ： 85℃ （or the specification shall prevail） Duration：1000 hours Vdd Applied	±10.0 ppm
5	Vibration	Duration ： 2 hours/each direction Frequency range：10～55 Hz Direction：3 axis	±10.0 ppm
6	Mechanical Shock	Acceleration：100 g Duration：6.0 ms Test cycles：3 times for all 6 axis，half sina	±10.0 ppm
7	Drop Test	Height：100 cm Test cycles：3 times	±10.0 ppm
8	Solderability	Soldering bath temperature：245℃ ± 5℃ Duration：2±0.6 second	95% Coated
9	Resistance to Soldering Heat	Soldering temperature：260℃ ± 5℃ Duration：15±5 second	±10.0 ppm
10	Board Flex	Height：3.0 mm Duration：5 second Speed：0.5mm/sec 	±10.0 ppm

11.Package Information

Tape (Carrier) Dimensions Unit：mm

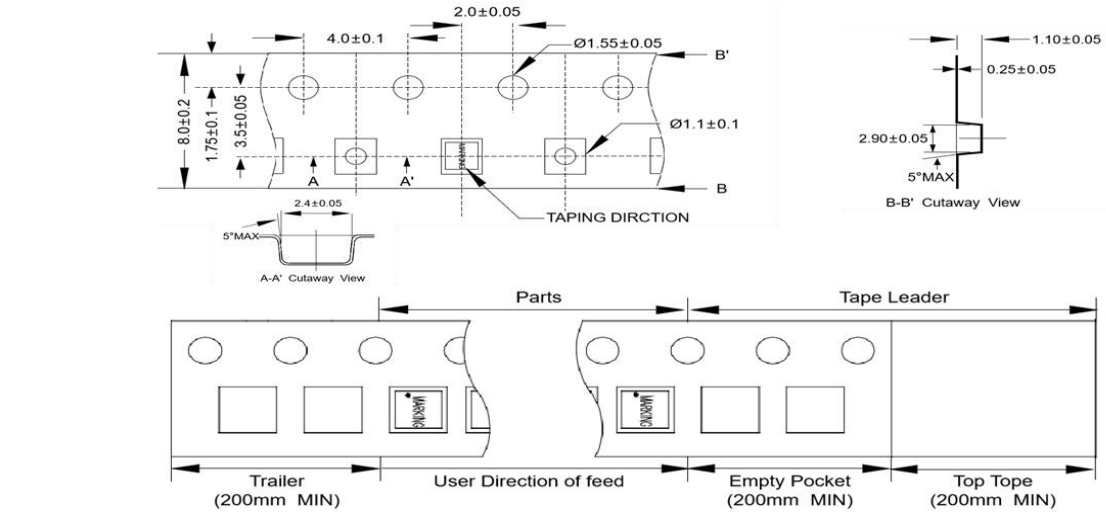

The Direction of Packing

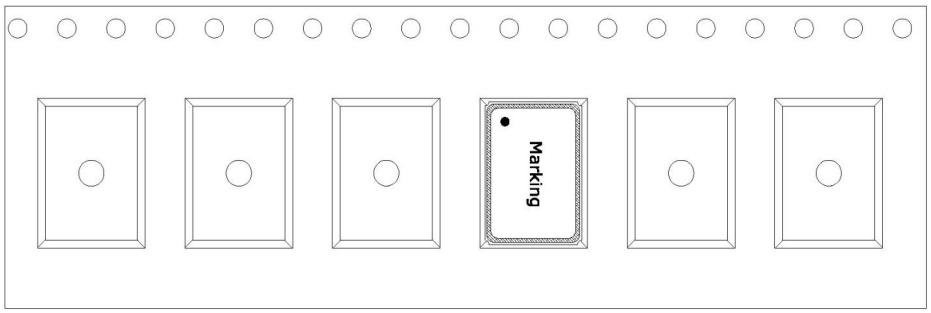

Reel Dimensions 3000 Pcs/Reel Unit：mm

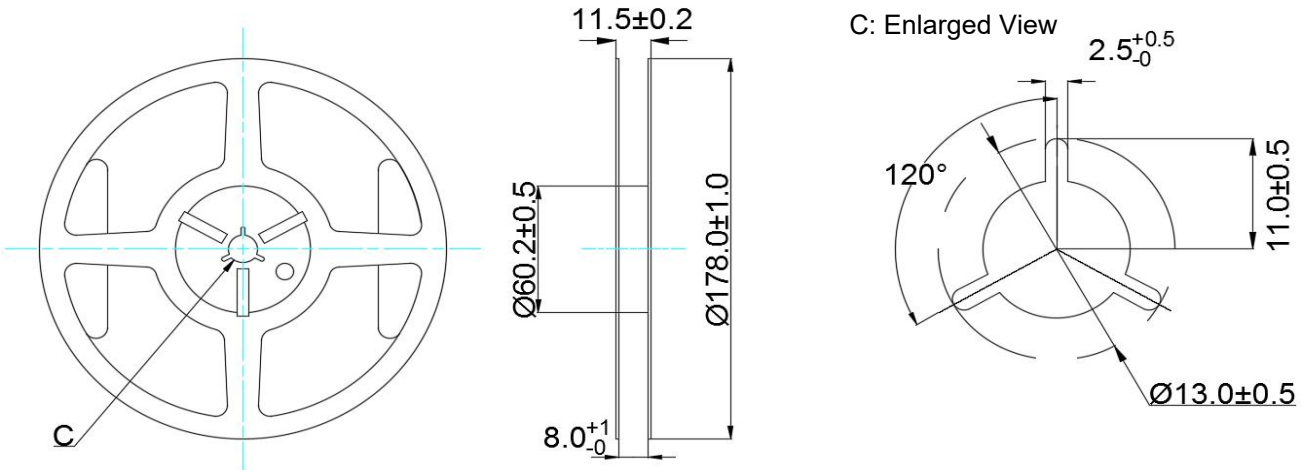

Handling Instructions

1. Cautions for Handling

a) Prevention against electrostatic breakdown

Your full attention to static electricity is still requested.

b) Direction

Before mounting the crystal oscillator on board, Please confirm the direction to make sure the GND terminal and the terminal of power supply are not taken wrongly.

2. Prevention against Vibration and Shock

While the product is being transported or mounted onto board, if undue hock and vibration exceeding the specification is put on, there is risk hat the built-in crystal blank is broken.

When undue shock and vibration exceeding the specification is put on the product,please be sure to make confirmation of the product's characteristics.

3. Soldering

In order to assure the reliability of the crystal oscillator, please use the product under the recommended conditions.

4. Surface mounting

a)This product is surface-mounting device.

So, Please pay attention to the following things.

b)Extreme deformation of board may make pattern off, the electrode of terminals off and solder broken.Full attention is requested especially when splitting the board with the oscillator mounted where the camber of the board occurs.

c)In case that automatic mounter is used, please choose the type with small shock generation and make confirmation of the shock before use.

5. Cleaning

Because cleaning will cause change to all characteristics, cleaning is forbidden.

6. Store keeping (method and duration)

Long-time storage in the high/low temperature and high humidity leads to deterioration of solderability. So, please keep the product in the temperature of +5~+35 and humidity of 45~70%.

Moreover, please keep the product in the circumstance with measures against static electricity.

(Please use it after confirming the product solderability.)

7. Caution

This product should not be used in toxic, harmful, or corrosive environments such as mercury, chlorine, sulfur, acid-base environments etc.

8. Application scenarios

TKD products are designed specifically for general and specific electronic applications. Without confirmation, they should not be used in critical areas beyond expectations, such as space technology, vehicle control, military weapon development, etc., to avoid significant risks to safety, health, property, or society. For intended use only, there is no additional guarantee for specific use products. If you need products for specific purposes, please consult TKD sales representatives in advance.